

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/021542 A1

(51) International Patent Classification⁷: **H02J 7/34**
(21) International Application Number:
PCT/AU2003/001117
(22) International Filing Date: 29 August 2003 (29.08.2003)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
2002951109 29 August 2002 (29.08.2002) AU
2002951291 9 September 2002 (09.09.2002) AU
PCT/AU02/01762
23 December 2002 (23.12.2002) AU

(72) Inventors; and
(75) Inventors/Applicants (for US only): MARS, Pierre [AU/AU]; Units 9 & 10, 12 Mars Road, Lane Cove, New South Wales 2066 (AU). PAUL, George, Lange [AU/AU]; 21A Greville Street, Chatswood West, New South Wales 2067 (AU).

(74) Agent: BALDWIN SHELSTON WATERS; 60 Margaret Street, Sydney, NSW 2000 (AU).


(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): ENERGY STORAGE SYSTEMS PTY LTD [AU/AU]; Units 9 & 10, 12 Mars Road, Lane Cove, New South Wales 2066 (AU).

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: A POWER SUPPLY FOR A COMMUNICATIONS MODULE THAT DEMANDS HIGH POWER DURING PREDETERMINED PERIODS

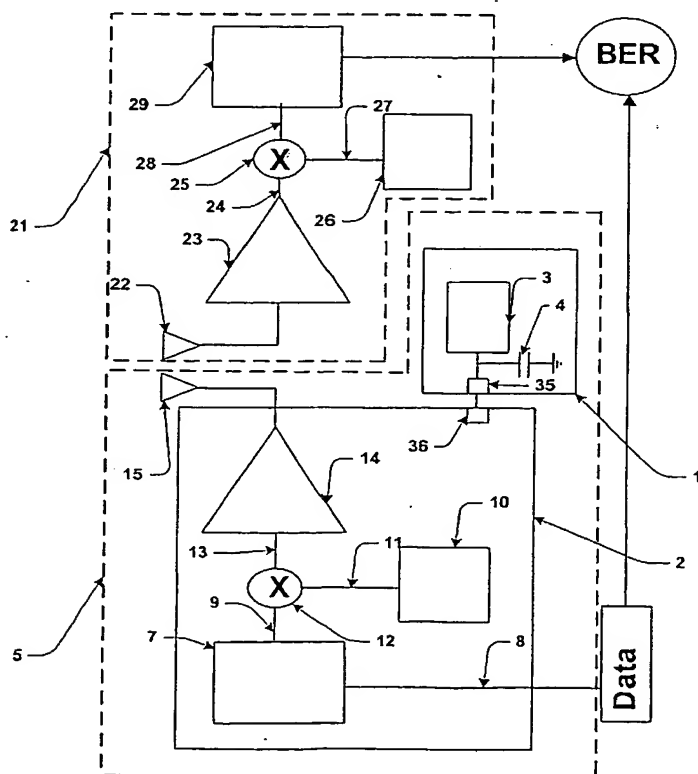

(57) **Abstract:** A power supply (1) is provided for a communications module, in the form of a cellular telephone GPRS module (2). This module demands high power during predetermined periods. Supply (1) includes a battery module (3) for providing module (2) with a supply voltage that, in this embodiment, is about 3.6 Volts. During the predetermined periods, module (3) provides a first current at a first voltage that is less than the supply voltage. A supercapacitive device, in the form of a single supercapacitor (4), is connected in parallel with module (3) for providing module (2) with, a second current during the predetermined periods such that first voltage is maintained above about 90 % of the supply voltage. That is, the first voltage is maintained above about 3.24 Volts.

WO 2004/021542 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), For two-letter codes and other abbreviations, refer to the "Guid-
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ance Notes on Codes and Abbreviations" appearing at the begin-
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, ning of each regular issue of the PCT Gazette.
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report